


## TUMBLING TRACK « NOVATRACK'ONE »

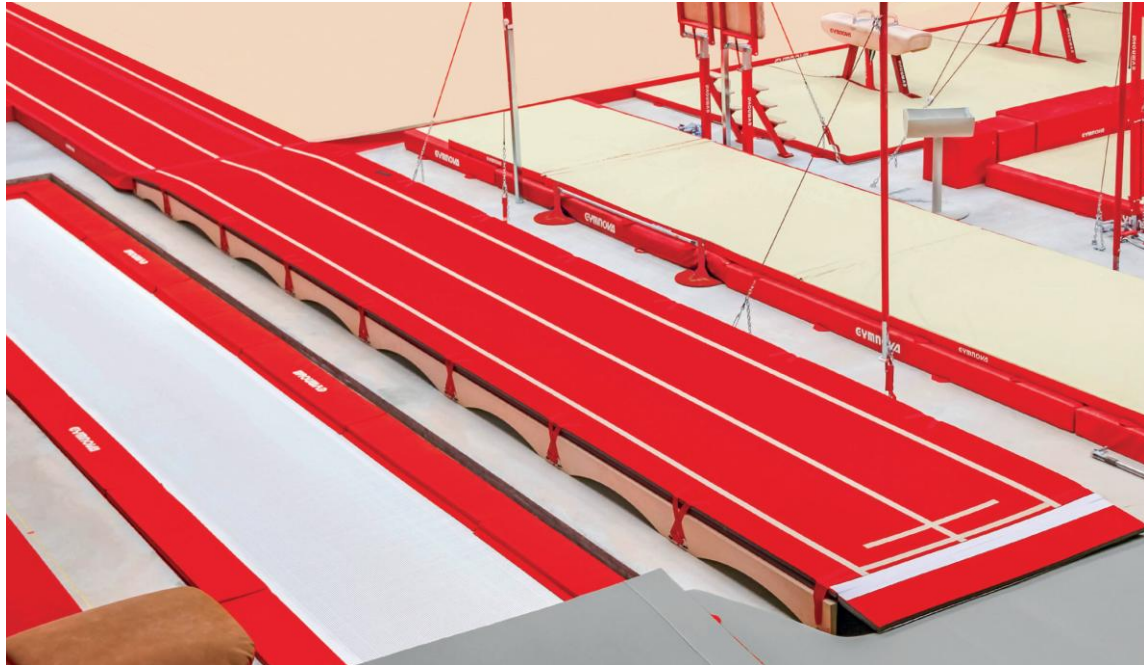

*=> Tumbling track used at the 2010 World Championships in Metz, and at the 2011 World Championships in Birmingham*

- ❑ F.I.G Approved
- ❑ This track provides a dynamic rebound that will allow the development of complex technical skills
- ❑ Special high-strength carpet
- ❑ Dynamic area marked with hook and loop fastener
- ❑ Tumble track with a run up of 10.5 m and a 30 cm thick landing area for a safe tumbler's landing
- ❑ Easy storage with an optional trolley
- ❑ Silent, stable, bouncy and comfortable

## TECHNICAL FEATURES

- Tumbling track, dim. = 25.50 m x 2 m
- Dynamic track composed of 17 pieces of 1.50 x 2.00 x 0.22 m
- Each piece is made from 2 wooden frame mounted with 15 fibre glass tubes on which are placed 2 roll-up foam tracks of 25.5 m long and 4 cm thick each
- Fixing with hook and loop fastener and metal pins



□ **Ref. 6297 - RUN-UP TRACK**

- Composed of 7 wooden plates with metal legs of 1.50 x 1.00 m on which is placed a monobloc foam track of 10.5 x 1.00 m and 2.5 cm thick
- Junction of the plates connected by hook and loop fastener
- Side skirt on the perimeter
- Link with track through dedicated flap




**Ref. 6297**

□ **Ref. 6298 - TUMBLE TRACK NOVATRACK'ONE**

- Dim. = 25.50 x 2 m

□ **Ref. 6299 - LANDING AREA**


- Composed of 3 bi-density mats for a more stable, safe and comfortable landing
- Thickness: 30 cm
- Total length: 6 m
- Junction of the mats connected by hook and loop fastener and landing area marked with hook and loop fastener
- Link with track through dedicated strap and flap

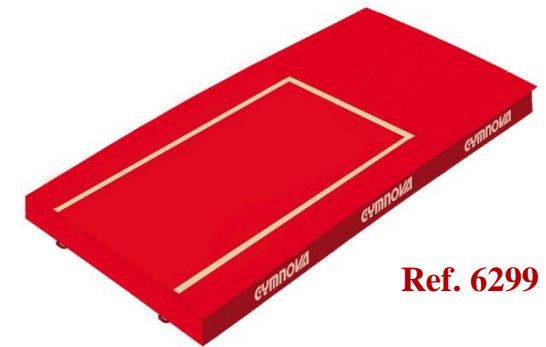

**Ref. 6299**

□ **Ref. 6299/30 - ADDITIONAL MAT (OPTIONAL)**

- "Leather look" PVC cover, 4 m long, 2 m wide
- Thickness: 10 cm
- Junction to the landing area connected by hook and loop fastener
- Anti-slip underside

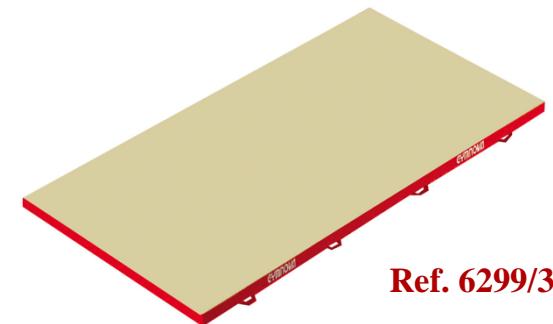

**Ref. 6299/30**